

Employing a bees colony algorithm to solve the problem of improving the reliability of a complex network

Ghazi Abdullah^{1,a}

^{1,4} Department of Mathematics, College of Education for Pure Sciences, University of Babylon, Iraq.
aghazi717@yahoo.com, pure.ghazi.abd@uobabylon.edu.iq

Fouad Hamza Abd Alsharify^{2,b}

²Department of Physics, College of Science, University of Babylon, Iraq.
bsci.fouad.hamzah@uobabylon.edu.iq

Hatem Kareem Sulaiman^{3,c}

³ Department of Mathematics, Directorate of Education Babylon, Babylon Iraq.
c_hatim19861986@gmail.com.

Zahir Abdul Haddi Hassan^{4,d}

^{1,4} Department of Mathematics, College of Education for Pure Sciences, University of Babylon, Iraq.
d_mathzahir@gmail.com

ABSTRACT

In The allocation of reliability and optimization for each part of the complex system has been determined in this paper, in order to solve the problem of allocation and to improve network stability we will use Bees Colony Optimization (BCO). The three cost functions are also introduced (exponential behavior with feasibility factor model, exponential behavior model and logarithmic model). After solving the allocation problem. The aim of this paper is to compare the effects of the three cost functions using Bees Colony algorithm in terms of reliability allocation and optimization to determine which is more efficient.

Keywords:

Reliability Allocation; Reliability Optimization; Allocation, , Bees Colony algorithm

1. Introduction

In the present article, we watched the installed complex system's efficiency. By using limited paths across relation matrices, this system was found to be efficient. (To create minimum paths, remove nodes) as well as Boolean algebra. The goal of evaluating to be learn about the protection of the sophisticated unit that has been built [1-3]. Despite the networks' foundations, the optimum distribution dependability is treated as a mathematical task in this research. Each and every dynamic

component Each device offers a unique set of features. dependability standards that are optimized and reliant on its importance [2, 4 - 6]. In order to achieve the highest level of efficiency in general, depending on the position of each element in the System, which varies between the component and the component, such components may require large allocations. Engineers working on improving mechanical and electrical systems encounter a variety of challenges [7]. The focus of this work is on complicated structure allocation and

improvement, in addition to the cost system, which can be assessed in terms of size, and proportion, or other criteria. The dependability of this component is based on two keys needs. To begin, the model should be used to determine the input variable reliability. You will change the parameters of the suggested cost parameter [3, 8-10]. Engineers may now upgrade their duties for each machine and prepare for the utmost Each device's productivity, second, the model's analytical performance should be balanced of the input system. This can be a huge difficulty in simple structures, but it can be In complex systems, this is a significant issue [11]. The expenses are calculated using the Bees Colony Optimization algorithm, which uses complex systems to solve optimization problems. The algorithm uses three cost functions " Modeling activity exponentially with the viability factor, The exponential behavior paradigm and a logarithmic model". The goal is to improve device reliability while lowering total expenses.

2. Optimization of complex system

Consider a system of interconnected components. [1-3]. We are reliant on statements.: $0 \leq R_i \leq 1$ dependability of a component i ; $C_i(R_i)$ the Individual Costs, Components i , $C(R_1, \dots, R_n) = \sum_{i=1}^n a_i C_i(R_i)$ Parts' Prices $a_i > 0$; The effectiveness of the system is measured in R_s , the device's reliability objective is denoted by the letter R_G . Each component of the scheme has a distinct goal, and there are several options. Device

modules have their own set of features. varying levels of assurance in the same characteristics. The objective is to ensure that any or all gadget components are trustworthy. The Q issue is a non-linear threshold with an evaluable cost and function [12-15]. Seek out

$$\text{Minimize } C(R_1, \dots, R_n) = \sum_{i=1}^n a_i C_i(R_i), a_i > 0, \tag{1}$$

within the terms of

$$R_G \leq R_S$$

$$0 \leq R_i \leq 1, \text{ such } i = 1, \dots, n.$$

Let's pretend the cost function is appropriate.. $C_i(R_i)$ satisfies those requirements [12, 16]. The favorable, unique role is being improved.

$$\left[\Rightarrow \frac{dC_i}{dR_i} \geq 0 \right].$$

The goal of the prior strategy was to achieve a cost basis that included everything [2, 4]. The stability limit of the system has been lowered. However It's in the vicinity the scope of R_G .

3. Application to complex network

All components in the complex network illustrated have the same as in fig. (1) primary trust level of 90% at the specified periods [11]. The system's aim for stability is 90 percent at any given time. The dependability polynomial for the proposed technique was found using the approach to minimal path [14].

$$\begin{aligned} R_S = & R_1 R_9 R_{10} + R_2 R_8 R_{10} + R_2 R_5 R_7 R_{10} + R_3 R_4 R_7 R_{10} + R_1 R_6 R_8 R_{10} + R_2 R_6 R_9 R_{10} - R_1 R_2 R_6 \\ & R_8 R_{10} - R_1 R_2 R_6 R_9 R_{10} + R_1 R_5 R_6 R_7 R_{10} - R_1 R_2 R_8 R_9 R_{10} + R_3 R_4 R_5 R_8 R_{10} - R_2 R_5 R_7 R_8 \\ & R_{10} - R_1 R_6 R_8 R_9 R_{10} - R_2 R_6 R_8 R_9 R_{10} - R_1 R_2 R_5 R_6 R_7 R_{10} - R_2 R_3 R_4 R_5 R_7 R_{10} - R_2 R_3 R_4 \\ & R_5 R_8 R_{10} - R_1 R_2 R_5 R_7 R_9 R_{10} - R_1 R_3 R_4 R_7 R_9 R_{10} - R_2 R_3 R_4 R_7 R_8 R_{10} + 2R_1 R_2 R_6 R_8 R_9 \\ & R_{10} - R_1 R_5 R_6 R_7 R_8 R_{10} + R_3 R_4 R_5 R_6 R_9 R_{10} - R_3 R_4 R_5 R_7 R_8 R_{10} - R_1 R_5 R_6 R_7 R_9 R_{10} - \\ & R_2 R_5 R_6 R_7 R_9 R_{10} - R_1 R_3 R_4 R_5 R_6 R_7 R_{10} - R_1 R_3 R_4 R_5 R_6 R_8 R_{10} - R_1 R_3 R_4 R_5 R_6 R_9 R_{10} + \\ & R_1 R_2 R_5 R_6 R_7 R_8 R_{10} - R_1 R_3 R_4 R_6 R_7 R_8 R_{10} - R_2 R_3 R_4 R_5 R_6 R_9 R_{10} + 2R_2 R_3 R_4 R_5 R_7 R_8 \\ & R_{10} + 2R_1 R_2 R_5 R_6 R_7 R_9 R_{10} - R_1 R_3 R_4 R_5 R_8 R_9 R_{10} - R_2 R_3 R_4 R_6 R_7 R_9 R_{10} + R_1 R_2 R_5 R_7 \\ & R_8 R_9 R_{10} - R_3 R_4 R_5 R_6 R_7 R_9 R_{10} - R_3 R_4 R_5 R_6 R_8 R_9 R_{10} + R_1 R_5 R_6 R_7 R_8 R_9 R_{10} + R_2 R_5 \\ & R_6 R_7 R_8 R_9 R_{10} + R_1 R_2 R_3 R_4 R_5 R_6 R_7 R_{10} + R_1 R_2 R_3 R_4 R_5 R_6 R_8 R_{10} + R_1 R_2 R_3 R_4 R_5 R_6 \\ & R_9 R_{10} + R_1 R_2 R_3 R_4 R_5 R_7 R_9 R_{10} + R_1 R_2 R_3 R_4 R_6 R_7 R_8 R_{10} + R_1 R_2 R_3 R_4 R_5 R_8 R_9 R_{10} + \\ & R_1 R_2 R_3 R_4 R_6 R_7 R_9 R_{10} + R_1 R_2 R_3 R_4 R_7 R_8 R_9 R_{10} + 2 R_1 R_3 R_4 R_5 R_6 R_7 R_8 R_{10} + \\ & 2 R_1 R_3 R_4 R_5 R_6 R_7 R_9 R_{10} + 2 R_1 R_3 R_4 R_5 R_6 R_8 R_9 R_{10} + 2 R_2 R_3 R_4 R_5 R_6 R_7 R_9 R_{10} + \\ & R_1 R_3 R_4 R_5 R_7 R_8 R_9 R_{10} + R_2 R_3 R_4 R_5 R_6 R_8 R_9 R_{10} - 2 R_1 R_2 R_5 R_6 R_7 R_8 R_9 R_{10} + \end{aligned}$$

$$R_1 R_3 R_4 R_6 R_7 R_8 R_9 R_{10} + R_2 R_3 R_4 R_6 R_7 R_8 R_9 R_{10} + R_3 R_4 R_5 R_6 R_7 R_8 R_9 R_{10} -$$

$$2 R_1 R_2 R_3 R_4 R_5 R_6 R_7 R_8 R_{10} - 3 R_1 R_2 R_3 R_4 R_5 R_6 R_7 R_9 R_{10} - 2 R_1 R_2 R_3 R_4 R_5 R_6 R_8 R_9$$

$$R_{10} - 2 R_1 R_2 R_3 R_4 R_5 R_7 R_8 R_9 R_{10} - 2 R_1 R_2 R_3 R_4 R_6 R_7 R_8 R_9 R_{10} - 3 R_1 R_3 R_4 R_5 R_6 R_7 R_8$$

$$R_9 R_{10} - 2 R_2 R_3 R_4 R_5 R_6 R_7 R_8 R_9 R_{10} + 4 R_1 R_2 R_3 R_4 R_5 R_6 R_7 R_8 R_9 R_{10}$$

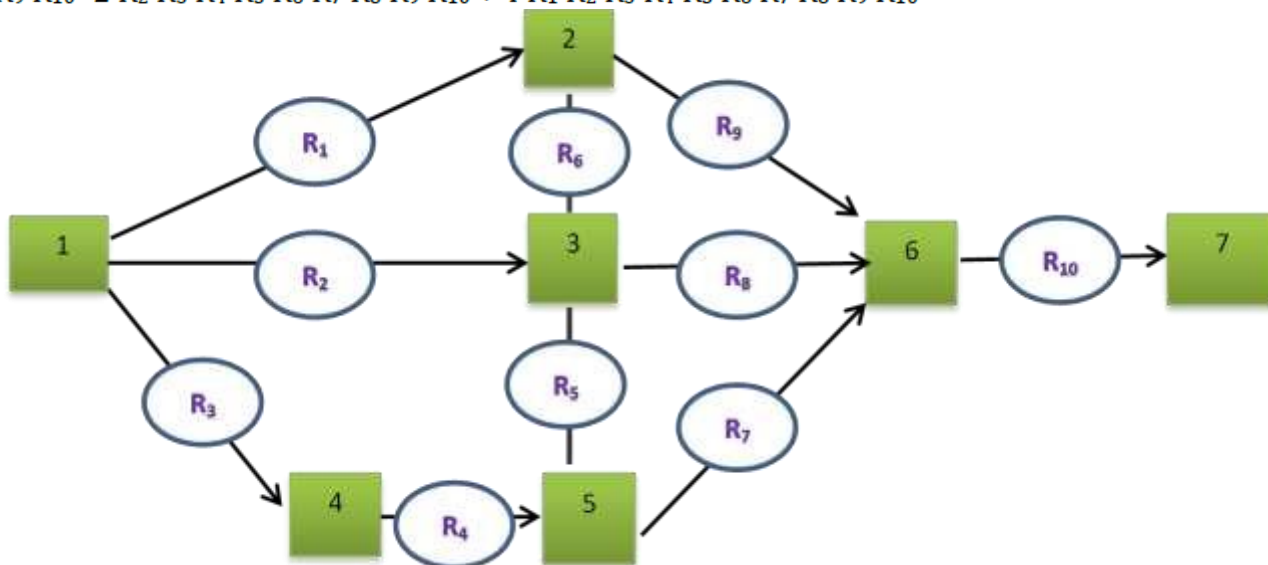


Figure 1 : Complex Network

4. Three cost models for reliability.

4.1 Model of exponential behavior with a feasibility parameter

Suppose $0 < f_i < 1$ be the feasibility factor, $R_{i,min}$ be minimum reliability and $R_{i,max}$ be maximum reliability[3,4]. Exponential behavior is another important cost function.

$$C_i(R_i) = \exp\left[(1 - f_i) \frac{R_i - R_{i,min}}{R_{i,max} - R_i}\right], R_{i,min} \leq R_i \leq R_{i,max}, i = 1, 2, 3, \dots, n. \tag{4.1}$$

The issue of optimization then:

$$\text{Minimize } C(R_1, \dots, R_n) = \sum_{i=1}^n a_i \exp\left[(1 - f_i) \frac{R_i - R_{i,min}}{R_{i,max} - R_i}\right], i = 1, 2, \dots, n.$$

Subject to:

$$R_s \geq R_G$$

$$R_{i,min} \leq R_i < R_{i,max}, i = 1, \dots, n.$$

Table 1: The Optimal Reliability Allocation (ACO).

Components	R _i	C _i
R ₁	0.85675	19.894
R ₂	0.91404	203.7
R ₃	0.805	7.8782
R ₄	0.86674	25.843
R ₅	0.77627	5.6679
R ₆	0.78884	6.4744
R ₇	0.86263	23.102
R ₈	0.775	5.597
R ₉	0.91404	203.7
R ₁₀	0.91404	203.7
R _s	0.90555	352.78

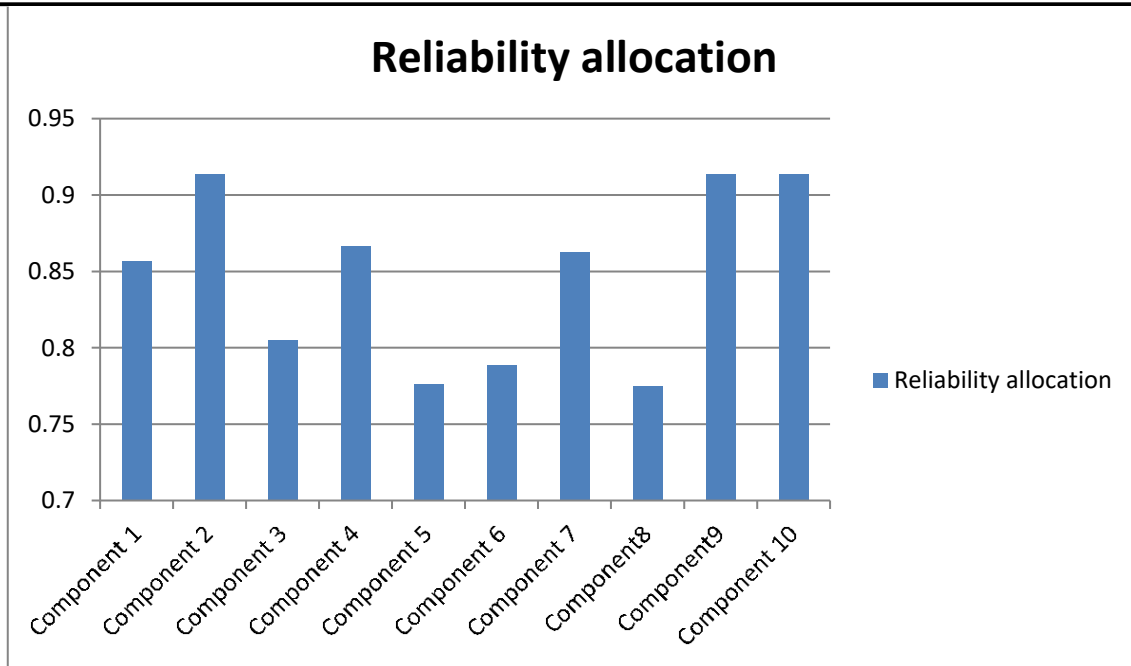


Figure 2: Allocating reliability using exponential behavior model with feasibility factor model for complex network.

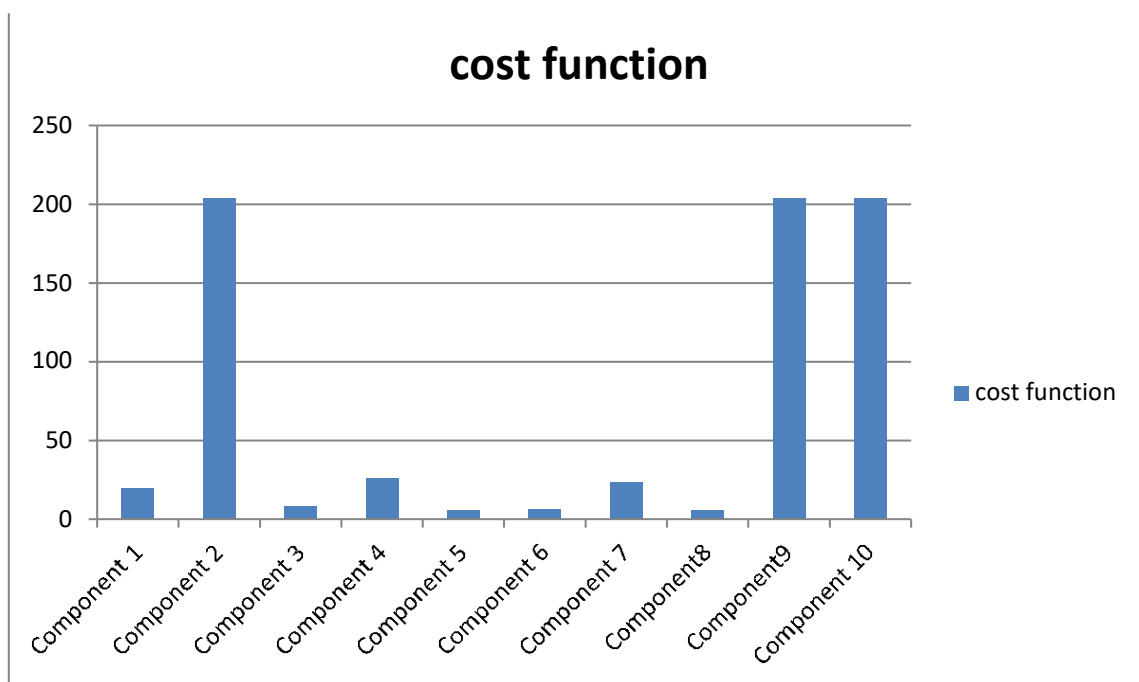


Figure 3 : A cost function for a model-viable exponential behavior process.

4.2 Exponential behavior model

Suppose $0 \leq R_i$, and $R_i \leq 1$ and, Constants a_i and b_i , where $i = 1, \dots, n$. The exponential procedure is the most important cost function. Suggested it in the following format:

$$C_i(R_i) = a_i e^{\left(\frac{b_i}{1-R_i}\right)}, a_i > 0, b_i > 0, \text{ where } i = 1, \dots, n. \tag{4.2}$$

The issue of optimization then:

Minimize $C(R_1, \dots, R_n) = \sum_{i=1}^n a_i e^{\left(\frac{b_i}{1-R_i}\right)}$, where $i = 1, \dots, n$.
 Subject to:

$R_G \leq R_S$
 $0 \leq R_i \leq 1$, where $i = 1, \dots, n$.
 Table 2: The Optimal Reliability Allocation (ACO).

Components	Ri 0.863	Ci
R1	0.877	38.461
R2	0.87131	58.267
R3	0.87117	48.68
R4	0.825	48.475
R5	0.912	17.412
R6	0.912	293.48
R7	0.876	293.48
R8	0.79158	56.388
R9	0.912	11.013
R10	0.90461	293.48
Rs		579.57

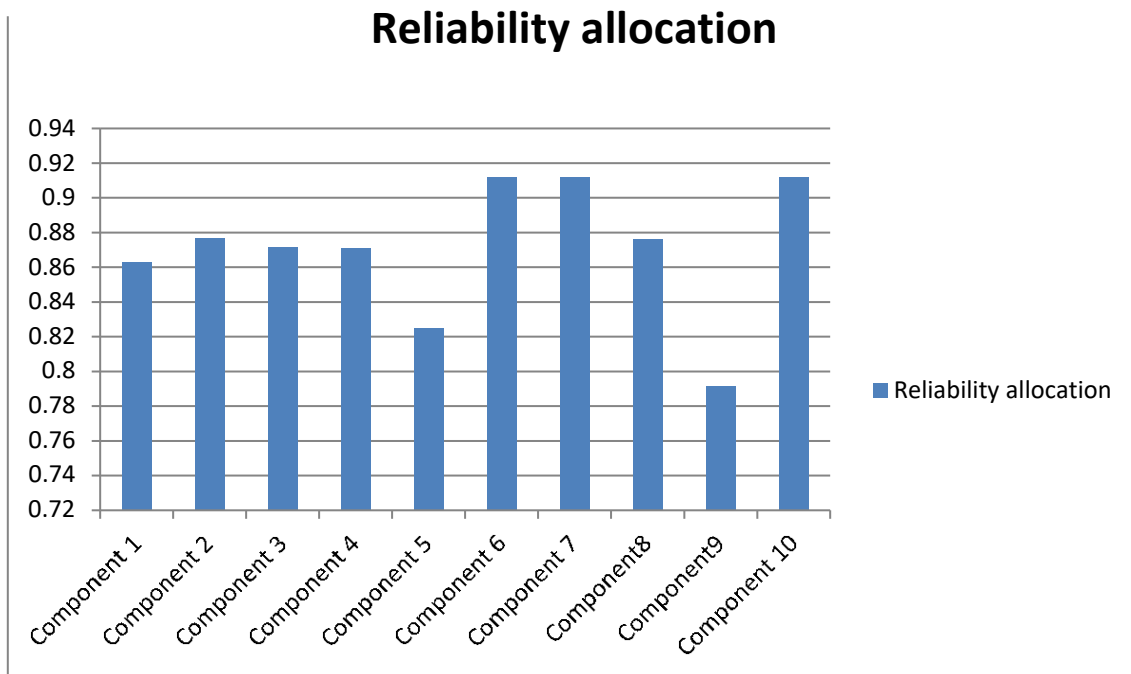


Figure 4: Allocating reliability for complex network by the exponential behavior model.

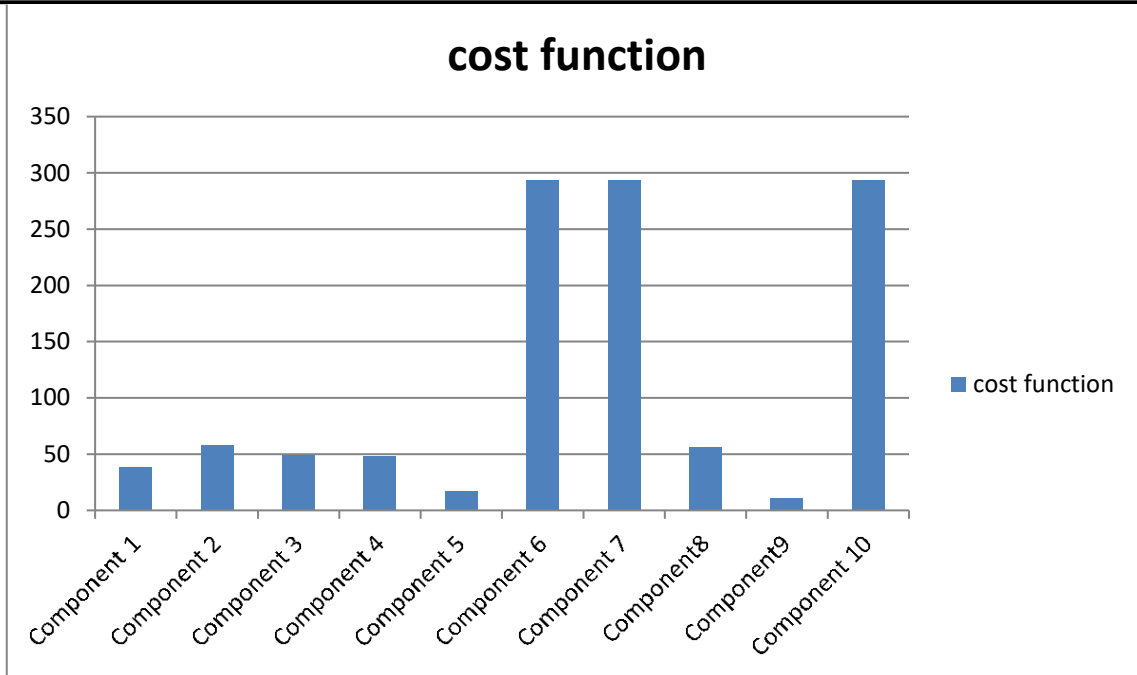


Figure 5: A cost function of a complicated network is determined using the exponential behavior model.

4.3 Logarithmic model

Let $0 \leq R_i$, and $R_i \leq 1$ and, Constants a_i where $i = 1, \dots, n$. Let's suppose it in the form

$$C_i(R_i) = a_i \ln\left(\frac{1}{1-R_i}\right), a_i > 0, i = 1, \dots, n \tag{4.3}$$

The issue of optimization then.:

$$\text{Minimize } C(R_1, \dots, R_n) = \sum_{i=1}^n a_i \ln\left(\frac{1}{1-R_i}\right), \text{ where } i = 1, \dots, n.$$

Subject to:

$$R_G \leq R_S$$

$$0 \leq R_i \leq 1, \text{ where } i = 1, \dots, n.$$

Table 3: Table for ACO-Based Optimal Reliability Allocation

Components	R_i	C_i
R_1	0.997	5.8091
R_2	0.852	1.9105
R_3	0.55	0.79851
R_4	0.586	0.88189
R_5	0.57	0.84397
R_6	0.592	0.89649
R_7	0.637	1.0134
R_8	0.997	5.8091
R_9	0.977	3.7723
R_{10}	0.997	5.8091
R_S	0.99564	13.772

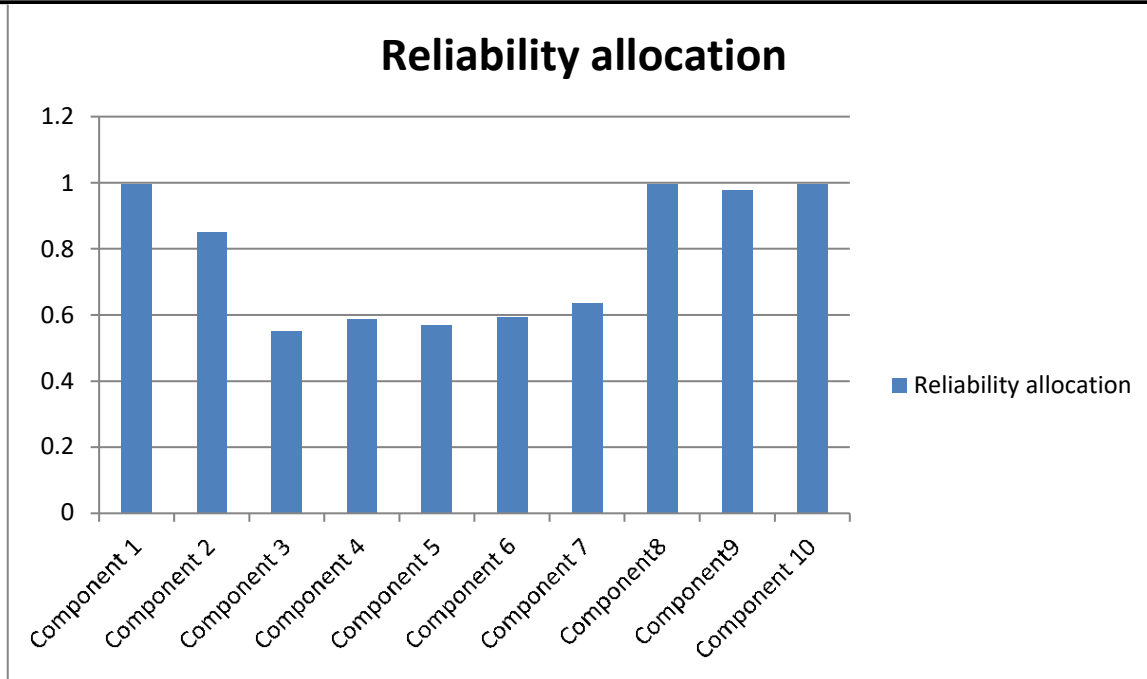


Figure 6: Allocating reliability for complex systems using the logarithmic model.

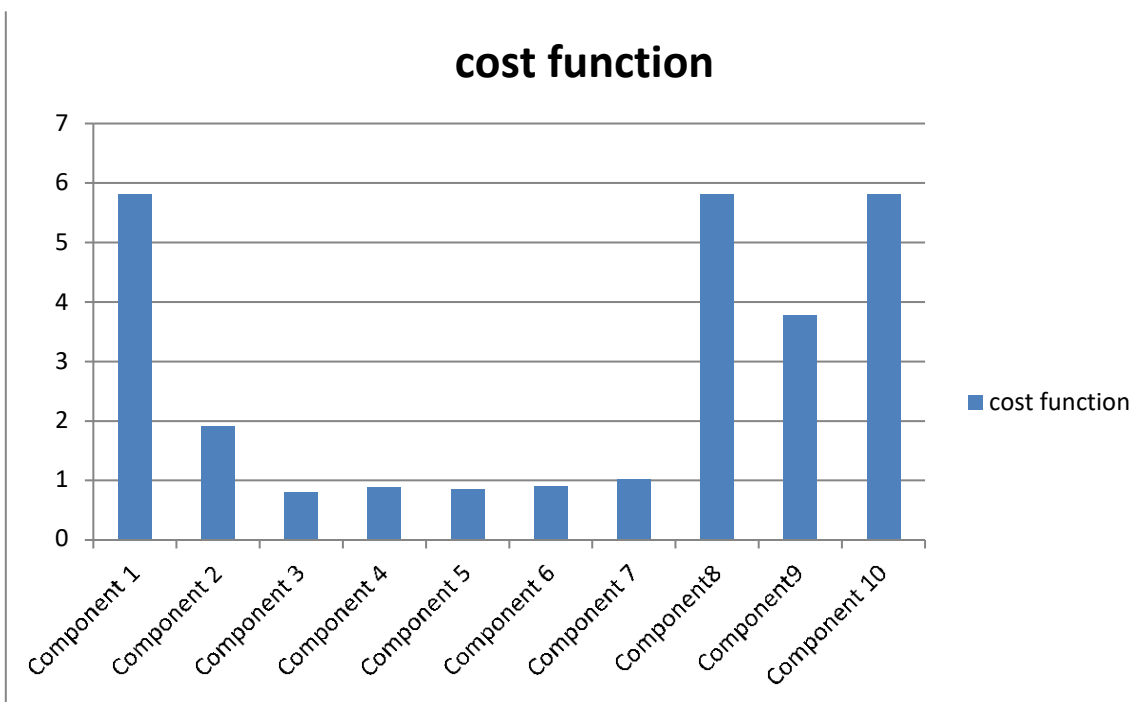


Figure 7: A logarithmic formula is by to calculate a cost function for a complex structur

Table 4: The Presenting Three Cost Function Models' Solutions to The Reliability Allocation Problem's (ACO)

Components	The first cost function	The second cost function	The third cost function
R ₁	0.85675	0.863	0.997
R ₂	0.91404	0.877	0.852
R ₃	0.805	0.87131	0.55
R ₄	0.86674	0.87117	0.586

R ₅	0.77627	0.825	0.57
R ₆	0.78884	0.912	0.592
R ₇	0.86263	0.912	0.637
R ₈	0.775	0.876	0.997
R ₉	0.91404	0.79158	0.977
R ₁₀	0.91404	0.912	0.997
R _s	0.90555	0.90461	0.99564

5. Discuss the outcomes

The last table shows the three cost functions we employed. and found that the logarithmic model provided the best results, with $R_s=0.99564$. Despite the fact that the cost of each complicated system component was computed, the overall each cost function's cost was determined using the (BCO), and a function's value was an exponential behavior model with a feasibility factor of (352.78). While a function's cost with an exponential behavior model is (579.57) and the logarithmic model's last cost of a function (13.772).

6. Conclusions

The challenge of enhancing a complicated network was handled in this article by assigning the dependability of system components according to their significance. For three costs with constraints, the topic was also treated as a nonlinear programming challenge (reliability of complex systems). To tackle the reliability allocation problem, the ant colony optimization (BCO) method was utilized. A comparison was made between the findings when the data and discussions when the three cost functions were examined, The Logarithmic model proved to be the more effective than them. Component 10 earned the highest support, according to the reliability allocation issue. The benefit of this paradigm is that it accepts any algorithm., no matter how complex, to be implemented using mathematical techniques.

References

- [1] S. A. K. Abbas and Z. A. Haddi Hassan, Increase the Reliability of Critical Units by Using Redundant Technologies, *Journal of Physics: Conference Series*, vol. 1999, no. 1, p. 012107, 2021/09/01 2021, doi: 10.1088/1742-6596/1999/1/012107.
- [2] S. A. K. Abbas and Z. A. H. Hassan, Use of ARINC Approach method to evaluate the reliability assignment for mixed system, *Journal of Physics: Conference Series*, vol. 1999, no. 1, p. 012102, 2021/09/01 2021, doi: 10.1088/1742-6596/1999/1/012102.
- [3] F. H. Abd Alsharify and Z. A. Haddi Hassan, Computing the reliability of a complex network using two techniques, *Journal of Physics: Conference Series*, vol. 1963, no. 1, p. 012016, 2021/07/01 2021, doi: 10.1088/1742-6596/1963/1/012016.
- [4] F. H. Abd Alsharify, G. A. Mudhar, and Z. A. Haddi Hassan, A modified technique to compute the minimal path sets for the reliability of complex network, *Journal of Physics: Conference Series*, vol. 1999, no. 1, p. 012083, 2021/09/01 2021, doi: 10.1088/1742-6596/1999/1/012083.
- [5] G. Abdullah and Z. A. H. Hassan, Use of Bees Colony algorithm to allocate and improve reliability of complex network, *Journal of Physics: Conference Series*, vol. 1999, no. 1, p. 012081, 2021/09/01 2021, doi: 10.1088/1742-6596/1999/1/012081.
- [6] L. A. A. Ameer issa and Z. A. Haddi Hassan, Use of a modified Markov models for parallel reliability systems that are subject to maintenance, *Journal of Physics: Conference Series*, vol. 1999, no. 1, p. 012087, 2021/09/01 2021, doi: 10.1088/1742-6596/1999/1/012087.
- [7] Abdullah, G., Haddi Hassan, Z. A., 2020, Using of Genetic Algorithm to Evaluate Reliability Allocation and Optimization

- of Complex Network, IOP Conf. Ser.: Mater. Sci. Eng. 928(4) 0420333
- [8] Abdullah, G., Haddi Hassan, Z. A., 2020, Using of particle swarm optimization (PSO) to addressed reliability allocation of complex network, J. Phys.: Conf. Ser. 1664 (1) 012125.
- [9] Abdullah, G., Haddi Hassan, Z. A., 2021, A Comparison Between Genetic Algorithm and Practical Swarm to Investigate the Reliability Allocation of Complex Network, J. Phys.: Conf. Ser. 1818 (1) 012163.
- [10] Mutar, E. K. and Hassan Z. A. H., 2022, New properties of the equivalent reliability polynomial through the geometric representation, International Conference on Electrical, Computer and Energy Technologies (ICECET 2022), Prague-Czech Republic.
- [11] Abd Alsharify, F. H., & Hassan, Z. A. H. (2022). Optimization of complex system reliability: Bat algorithm based approach, International Journal of Health Sciences,6(S1), 14226–14232. <https://doi.org/10.53730/ijhs.v6nS1.8637>
- [12] Hassan, Z. A. H. and Mutar, E. K., (2017), Geometry of reliability models of electrical system used inside spacecraft, 2017 Second Al-Sadiq International Conference on Multidisciplinary in IT and Communication Science and Applications (AIC-MITCSA), pp. 301-306.
- [13] Hassan, Z. A. H. and Balan, V., (2017), Fuzzy T-map estimates of complex circuit reliability, International Conference on Current Research in Computer Science and Information Technology (ICCIT-2017), IEEE, Special issue, pp.136-139.
- [14] Hassan, Z. A. H. and Balan, V. (2015), Reliability extrema of a complex circuit on bi-variate slice classes, Karbala International Journal of Modern Science, vol. 1, no. 1, pp. 1-8.
- [15] Hassan, Z. A. H., Udriste, C. and Balan, V., (2016), Geometric properties of reliability polynomials, U.P.B. Sci. Bull., vol. 78, no. 1, pp. 3-12.
- [16] Saad Abbas Abed et al, 2019, Reliability Allocation and Optimization for (ROSS) of a Spacecraft by using Genetic Algorithm, J. Phys.: Conf. Ser. 1294 032034 10.1088/1742-6596/1294/3/032034
- [17] Hameed Saleh, A. A., & Haddi Hassan, Z. A. (2022). Addressing the problem of increasing the reliability of a mixed system. International Journal of Health Sciences,6(S5), 1013–1018. <https://doi.org/10.53730/ijhs.v6nS5.8802>